THIS SUMMER




Chr. Yo

- And

WITH YOUR TRUSTED LANDSCAPING SUPPLIER

your green escape

Creating the perfect garden means different things to different people... so if the outcome pleases you, we'd say that is a success! Enjoy finding some inspiration to create your green escape.

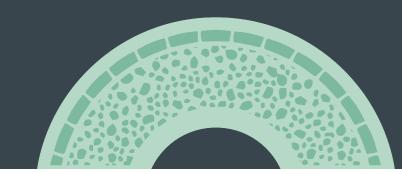

Contents

Bringing joy to your garden again!

4	Patio & Paving					
40	Block Paving					
44	Natural Stone Paving					
48	Porcelain Paving					
54	Aggregates					
	55 Decorative Aggregates					
	58 Rockery					
	59 Essentials					
	61 Horticultural					
62	Stepping Stones, Walling & Edging					
74	Landscaping Essentials					
78	Patio Construction & Care					
84	Important Information					



Welcome

We are a family business that over the years has become one of the UK's market leaders in landscaping and gardening materials.

Our products help you create an inspiring garden that suits your lifestyle, whether it's the hub of family activity or your peaceful retreat away from the world.

Visit us at our showroom

Bowland Stone 1 Cole Road, St. Philips, Bristol BS2 0UG

t: 01179 557530 e: bristol@bowlandstone.com

Find even more inspiration at www.bowlandstone.com

Est 1983



Every style for every garden

6	Baroque
8	Cathedral
12	Chalice
16	Chapter
17	County
18	Catherine Wheel
20	Deckpave
22	Lakeland
26	Prestbury
30	Rectory
32	Sleeper
33	Somerset
34	Stratford
36	Sun Circle & Auroro
38	Victorian Setts
39	Windsor

IMPORTANT INFORMATION

All images shown in this brochure are for illustrative purposes only. Every effort is made to ensure accurate colour representation, however due to photographic and printing processes and varying light conditions, colours may not exactly match current production. We strongly recommend that colours are judged and chosen from actual materials and samples are sought from your local retailer.






Specifications

Baroque

Baroque paving's sleek smooth lines and finely indented surface make it a very tactile product.

A style that will fit right in, giving you the perfect amount of imperfection to feel right at home. Baroque can be used alone to create a beautiful patio area or combine it with our Baroque Oval feature for a striking effect.

PLANS



Baroque Paving 5.76m²



Baroque Oval 3.2m

Baroque

The Oval has a unique shape with a beautiful finish that will look stunning in any style of garden.

PAVING PACK

Baroque Paving 5.76m ²	
Approx. Size: 2400mm x 2400mm	Pallet weight: 392.4 kg
Contents: 12 = 600 × 400 10 =	= 400 x 400 16 = 400 x 200


OVAL PATIO PACK

Baroque Oval 3.2m	
Approx. Size:	Approx. Size with infills:
3200mm x 2200mm	3200mm x 2400mm
Pallet weight: 390 kg	Infill pallet weight: 199 kg
Contents:	Infill contents:
30 specific shapes	20 specific shapes

PAVING STONES Size	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
600 x 400 (A)	4.2	15.5	6	25	387.5
400 x 400 (B)	6.3	11	8	50	550
200 × 400 (C)	12.5	5.5	4	50	275

Thickness: 32mm



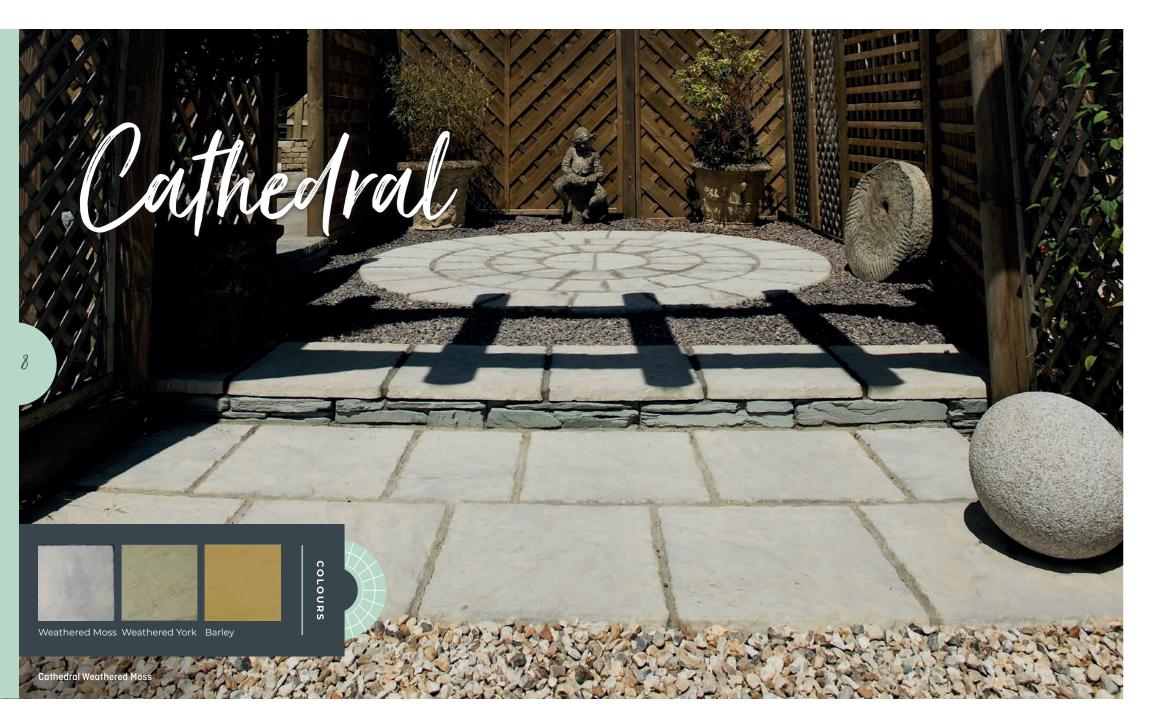


Specifications


Catheolral

The Cathedral paving range has a distinct rough-hewn texture that has been blended into three natural tones.


The weathered textures and tones of our Cathedral paving work beautifully with contemporary and traditional houses.



PLANS



Cathedral 5.76m²



Cathedral 7.29m²

Cathedral Circle

Complete your patio with our circular feature available in 3 sizes or individual pieces. See page 10.

PAVING PACKS

Cathedral 5.76m ²							
Approx. size:Pallet weight:2400mm x 2400mm484.4 kg							
Contents: 9 = 600 x 600 11 = 600 x 300 6 = 300 x 300							
Cathedral 7.29m ²							
Approx. size: 2700mm x 2700mm		Palle 586 l	e t weigh t <g< td=""><td>:</td><td></td></g<>	:			
Contents: 12 = 675 x 450 9 = 450 x 450 18 = 450 x 225							
Contents: 12 = 675 x 4	450 9 =	450 X 45	0 18 =	450 x 225	5		
Contents: 12 = 675 × 4	+50 9 =	450 X 45	0 18 =	450 x 225	5		
Contents: 12 = 675 x 4 PAVING STONES	Unit / m ²	Unit weight	m² / pallet	450 x 225 Nuit / ballet	Pallet weight		
PAVING STONES							
PAVING STONES Sizes	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight		
PAVING STONES Sizes 675 x 450 (A) *	E. Unit / m ²	5 Unit weight	.6 m ² / pallet	5 Unit / pallet	Pallet weight		
PAVING STONES Sizes 675 x 450 (A) * 600 x 600 (B)	C.8	Chuit weight	6.8 9.2 m ² / pallet	25 Unit / pallet	25 25 25 25		

* Only available within 7.29m2 Paving Pack Thickness: 38mm

300 x 300 (F)

11 7.5 4.5 50 375


Cathedral Circle

The Cathedral Circle is a perfect and flexible solution to creating a striking feature.


Available in various sizes and easily integrated into your patio using our corner infill sets.



PLANS



Cathedral Circle 1.8m (dia) Cathedral Circle 2.56m (dia)




Corner infill sets sold seperately

Cathedral Circle 3.48m (dia)

Complement

Meadow Walling Blocks perfectly complement Cathedral Paving, creating an authentic, rustic look.

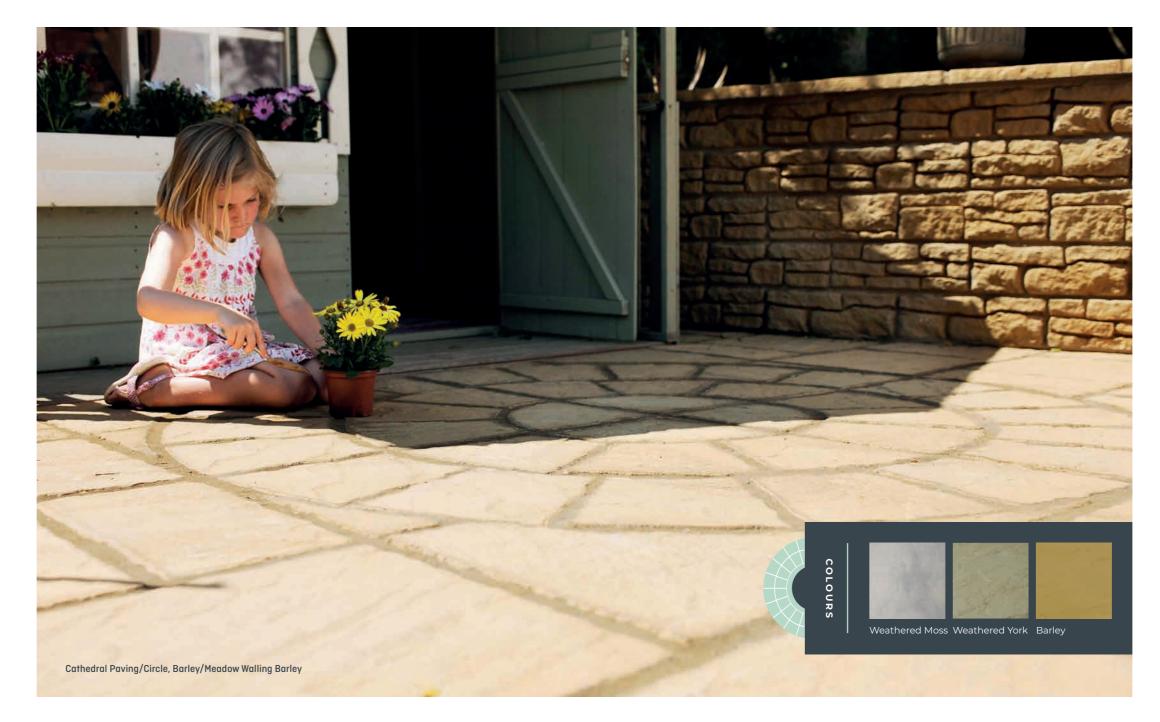

www.bowlandstone.com

PATIO & PAVING

Specifications

CIRCLE PATIO PACKS

Cathedral Circle 1.8m	
Approx. size: 1800mm (dia)	Approx. size with infills: 1800mm x 1800mm
Pallet weight: 216 kg	Infill pallet weight: 69 kg
Contents: 36 specific shapes	Infill contents: 12 specific shapes
Cathedral Circle 2.56m	
Approx. size: 2560mm (dia)	Approx. size with infills: 3000mm x 3000mm
Pallet weight: 416 kg	Infill pallet weight: 317 kg
Contents: 56 specific shapes	Infill contents: 20 specific shapes
Cathedral Circle 3.48m	
Approx. size: 3480mm (dia)	Approx. Size with infills: 3600mm x 3600mm
Pallet weight: 754 kg	Infill pallet weight: 340 kg
Contents: 76 specific shapes	Infill contents: 20 specific shapes

www.bowlandstone.com

PATIO & PAVING




Specifications

Chalice

Our Chalice paving recreates the look and feel of natural stone with a gentle, riven surface.

Lovingly crafted on all surfaces, so when an edge is visible the patio has the realistic appearance of age-old stone. Chalice is available in three unique colours, Honey Brown, Grey and Welsh Slate. The colours combine various hues to produce a stunning, warming blend that recreates the appearance of natural stone.

PLANS



Chalice Paving 5.76m^{2*}



Chalice Paving 7.29m²

Chalice Circle

Why not add another dimension to your Chalice Paving by adding a Chalice Circle feature.

PAVING PACK

Chalice 5.76m ^{2*}							
Approx. size:Pallet weight:2400mm x 2400mm405.5 kg							
Contents: 9 = 600 × 600 11 = 600 × 300 6 = 300 × 300							
*Not available in Grey	<i>.</i>						
Chalice 7.29m ²							
Approx. size: 2700mm x 2700mm		Palle 450.5	e t weigh t 5 kg	:			
Contents: 25 = 450 x 450 22 = 450 x 225							
	-50 22	430 X 2	225				
	-30 22	430 X 2	225				
PAVING STONES	Unit / m ²	Unit weight	m² / pallet	Unit / pallet	Pallet weight		
PAVING STONES				66 Unit / pallet	Pallet weight		
PAVING STONES Size	Unit / m²	Unit weight	m² / pallet	_	_		
PAVING STONES Size 600 × 600 (A) *	5.8 Unit / m ²	Duit weight	.01 m ² / pallet	30	765		
PAVING STONES Size 600 × 600 (A) * 600 × 300 (B) *	2.8 5.5	tugiant 25.5 13	2.5 ballet	30 60	765 780 360		

450 x 225 **(E)** 10 6.5 6 *Not available in Grey.


60 390 Thickness: 32mm


Chalice Circle

Our Chalice Circle is available in Honey Brown and Welsh Slate and adds another dimension to your Chalice Paving.

Available on its own or complete with corner infill set(s).







 Chalice Circle 3.24m²
 Chalice Circle 7.29m²

 (with corner infill set)
 (with corner infill set & paving)

Complement

Give your patio that 'edge', finish off with our perimeter edging creating a neat, striking border.



Specifications

CIRCLE PATIO PACKS

Chalice Circle 1.5m	
Approx. size: 1500mm (dia)	Pallet weight: 134 kg
Contents: 12 Specific shapes	
Chalice Circle 3.24m² Pack	Including corner infill set
Approx. size: 1800mm x 1800mm	Pallet weight: 210 kg
Contents: 24 Specific shapes	
Chalice Circle 7.29m ² Pack	Including corner infill set & paving
Approx. size: 2700mm x 2700mm	Pallet weight: 462 kg
Contents: 44 Specific shapes	

PATIO & PAVING


Chapter

Chapter's subtle worn-smooth riven appearance is suitable for many spaces.

Our Chapter circle allows stunning circle designs to be incorporated into your patio and is available to purchase completely individually giving you complete flexibility of design. PLANS



Chapter Circle 1m, 2m, 3m (dia)




Thickness: 38mm

Specifications



PATIO & PAVING

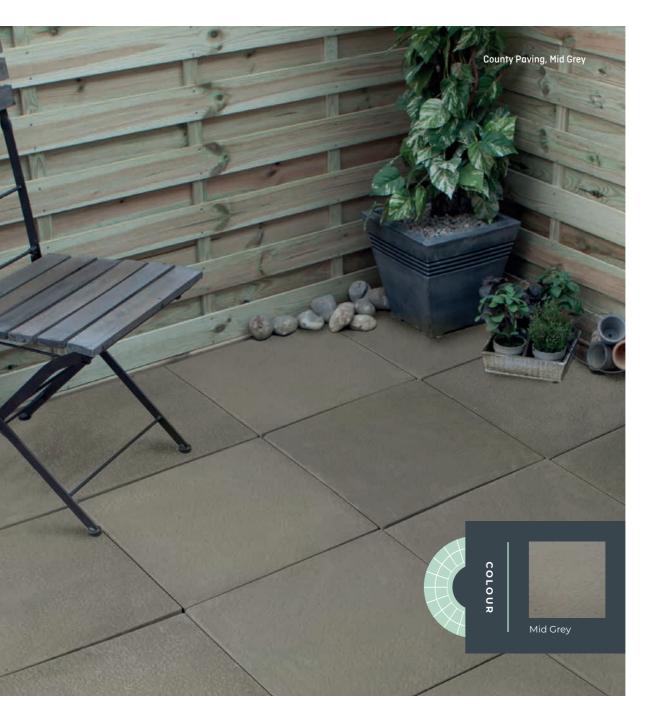

County

County is a tactile, lightly textured paving that is dynamic enough to suit any garden.

Only one size in this range but 'less is more' is definitely the case with this ontrend mid grey paving. Line up all your edges for a sleek, contemporary look or off set them on each row to give a more relaxed feel.

Specifications

PAVING STONES	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
450 x 450	5	15.7	8	40	628

Thickness: 38mm



Specifications

Catherine Wheel

Looking for something different? Our Catherine Wheel provides a stunning visual display for your garden, with a sawn edge enhancing its appearance of 'old stone'. Corner Infill Sets are available to allow you to integrate this circular design up against straight edges.

The Catherine Wheel has a natural worn look allowing it to instantly fit in with its surroundings and works in harmony with any type of garden. Matching stepping stones are also available to complete the look.

PLANS



CIRCLE PATIO PACKS

Catherine Wheel	Corner infill sets
Approx. size: 2090mm (dia)	Approx. size with infills: 2280mm x 2280mm
Pallet weight: 315 kg	Infill pallet weight: 174 kg

Thickness: 38mm



Complement

You are spoilt for choice, with various options to pair with the stunning visual of the Catherine Wheel.

You can add it to your every step with the matching stepping stones or use the beautiful Meadow Walling to add that rustic touch.





Deckpare


Our natural looking, durable Deckpave tiles will add flair to any garden patio.

They are made to fade like real wood but have many advantages to traditional decking including durability, and less upkeep.



Complement

The rich brown textured wood look of our Deckpave teamed perfectly with our light coloured cotswold chipping and bright pops of colour from pots and plants.

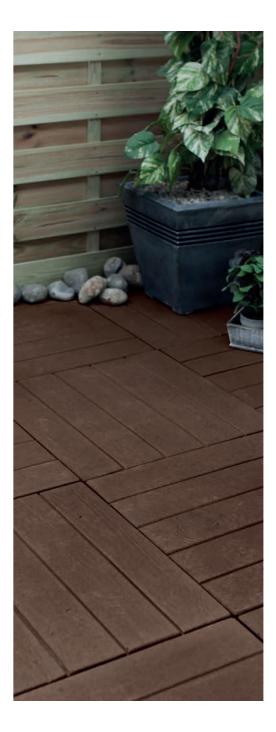

Specifications

PAVING STONES Size	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
500 x 500	4	19.1	6.25	25	477.5

Thickness: 35mm





Specifications

lakeland


Our ever-popular Lakeland range brings the unmistakable look and texture of natural slate to your garden.

Lakeland Paving is available in classic Cumbrian Slate in our convenient paving packs or individual sizes can be made to order.

For a classic natural slate look our Lakeland range is perfect. If you turn to page 66 you can find out more about our accompanying Lakeland Walling offering you a wide range of possibilities when creating your outdoor space.



PLANS



Lakeland 5.76m²

PAVING PACK

Lakeland 5.76m ²	
Approx. size: 2400 x 2400mm	Pallet weight: 475 kg
Contents: 12 = 600 x 400 10 =	400 x 400 16 = 400 x 200

PAVING STONES	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
600 x 400 (A) †	4.2	20.12	6.0	25	503
400 × 400 (B) †	6.3	13	8.0	50	650
400 x 200 (C) †	12.5	6.5	4.0	50	325
[†] Made to order (MTO)				Thicknes	s: 35mm

Complement


Use our Lakeland Edging Stones as a coping and create versatile planters on top of a wall.

lakeland Star & Sun


Our Lakeland Star and Sun Patio Packs are the perfect feature to create a striking contemporary design that will bring the wow factor to your garden.

Both come complete in a mix of two dramatic colours, Cumbrian Slate and Gold, with our Star design now also available in a striking combination of Welsh Slate and Portland Grey.

PLANS



Lakeland Star 5.76m²



Lakeland Sun 5.76m²



lakeland Star

Reach for the stars with our striking Lakeland Star Patio Pack.




Specifications

PATIO PACKS

Lakeland Sun 5.76m ²	
Approx. size: 2400 x 2400mm	Pallet weight: 471 kg
Lakeland Star 5.76m ²	Thickness: 35mm

Thickness: 35mm



25




Specifications

Prestbury

A high quality paving with a gentle texture and a smart, sophisticated appearance – you won't believe it's not porcelain!

With its fine, clean lines and smart design it's the perfect choice for the modern garden, creating a contemporary style you'll enjoy for years. Available in our natural-looking portland grey colour, which will suit any property.

PLANS



Prestbury Paving 5.76m²

PAVING PACK

Prestbury Paving 5.76m ²	
Approx. size: 2400 x 2400mm	Pallet weight: 462.2 kg
Contents: 12 = 600 × 400 10 =	400 x 400 16 = 400 x 200

PAVING STONES Size	Unit / m²	Unit weight
600 × 400 (A)*	4.2	18.2
400 x 400 (B)*	6.3	12.6
400 × 200 (C)*	12.5	6.2
*Only available as a paving pack	Thicknes	ss: 32mm



Prestbury Chevron


The geometric style of our Prestbury Chevron gives any garden a modern feel.

Prestbury CHEVRON


Create a unique garden space with our stylish Prestbury range.

Our Prestbury Chevron is available in the stylish Welsh Slate colour while the Prestbury Wave comes in calming Grey. Whether you choose the straight geometric lines of the Chevron or the soothing lines of the Wave, both will give your garden a dynamic and inspirational look.


PLANS



Prestbury Chevron 5.54m²




Prestbury Wave 5.76m²



Complement

Perfect paired with a contrasting edging.



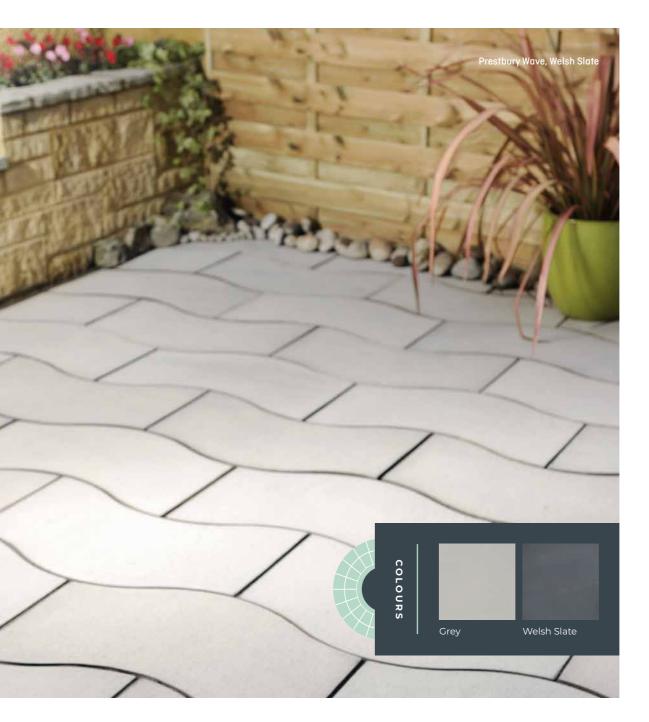

Specifications

PATIO PACKS

Prestbury Chevron 5.54m ²	
Approx. size:	Pallet weight:
2250 x 2460mm	44] kg
Prestbury Wave 5.76m ²	Thickness: 35mm
Approx. size:	Pallet weight:
2400 x 2400mm	462 kg

Thickness: 35mm

PATIO & PAVING




Specifications

Rectory


With its deep, heavy riven surface, Rectory Paving is full of character, ideal for creating idyllic spaces with a rural impression.

The traditional appearance of Rectory gives refinement to paved areas. Available in a convenient 5.76m² paving pack or individual sizes made to order.

PLANS



Rectory Paving 5.76m²



Rectory Circle 3.24m²

Complement

Contrast the traditional appearance of Rectory Paving with a modern driveway rumbled block, creating a statement entrance.

PAVING PACK

Rectory Paving 5.76m ²	
Approx. size: 2400 x 2400mm	Pallet weight: 408 kg
Contents: 9 = 600 × 600 11 =	600 x 300 6 = 300 x 300

PATIO PACK

Rectory Circle 3.24m ²	
Approx. size: 1800 x 1800mm dia	Pallet weight: 246.7 kg
Contents: 13 specific shapes	

PAVING STONES	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
600 x 600 (A)	2.8	25	10.71	30	750
600 x 300 (B)	5.5	12	10.91	60	720
450 x 450 (C) †	5	14	10.00	50	700
300 × 300 (D)	11	6	5.45	60	360

[†]Made to order (MTO)

Thickness: 32mm






Sleeper Paving captures the warm textures of real timber, without the maintenance.

Beautiful and durable, Sleeper Paving will bring a welcoming rustic feel to your garden. Available in three sizes.




PAVING STONES	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
900 x 225	4.9	20.5	4.1	20	410
675 x 225	6.6	15.5	3	20	310
225 x 225	20	5	2	40	200

Thickness: 45mm

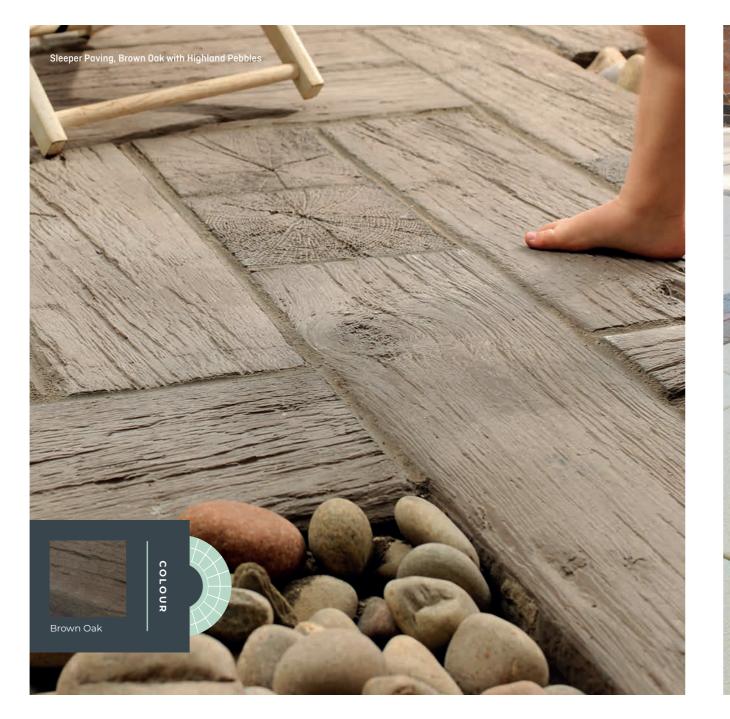

www.bowlandstone.com

PATIO & PAVING

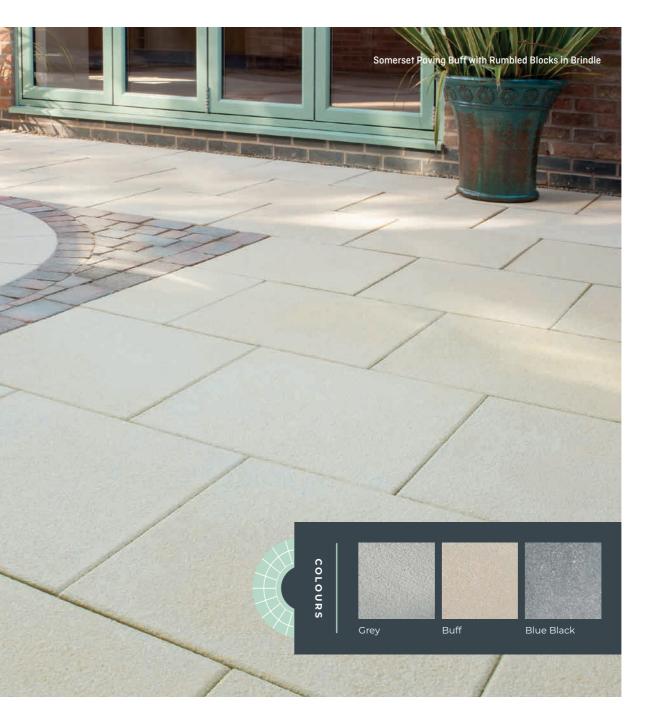

Somerset

Somerset has a contemporary textured surface suitable for many gardens.

As well as being both practical and hard wearing, the cool colours of Somerset Paving will create a sleek effect in your garden.


Specifications

33

PAVING STONES	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
450 x 450	5	17.5	8	40	700

Thickness: 32mm

PATIO & PAVING

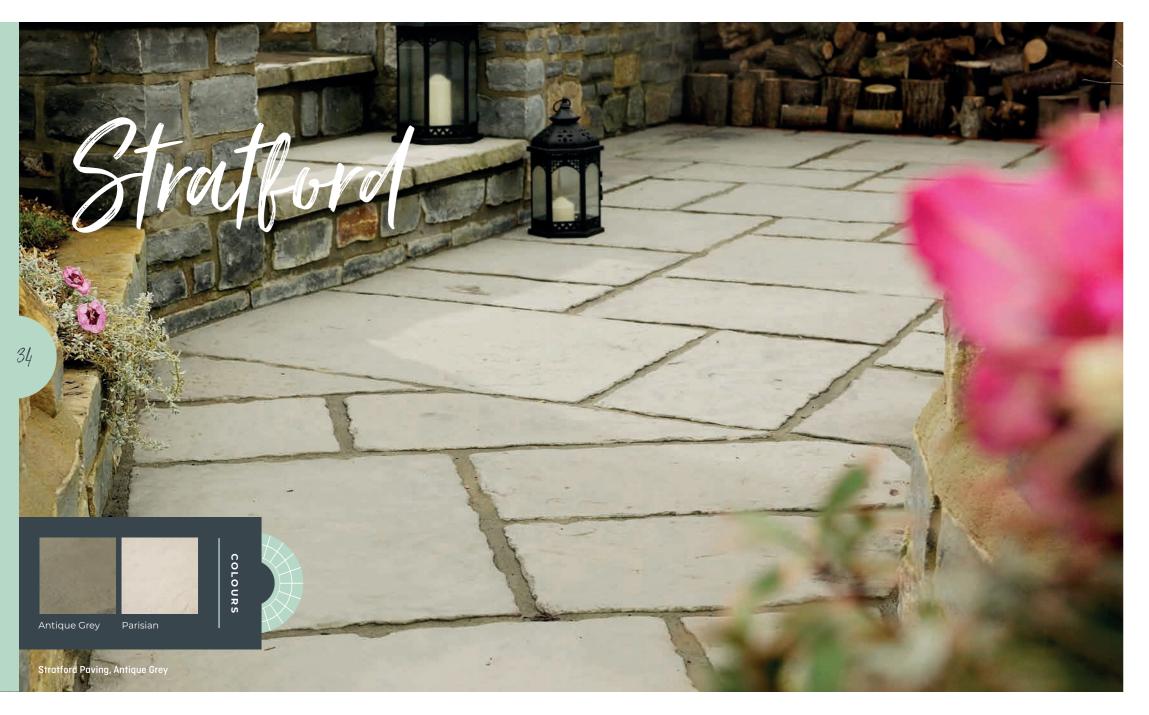


Specifications

Stratford


Stratford paving authentically captures the elegance of time-honoured stone, making it feel right at home from the moment it's laid.

With stones beautifully reproduced in Antique Grey and Parisian in a large array of sizes, Stratford paving is a cost-effective and flexible solution.

PLANS



Stratford Paving 5.76m²



Stratford Octagon 5.06m²



Complement

Make a fantastic focal point using the Stratford Octagon feature. Potted plants will add colour and really make your paving stand out.

PAVING PACK

Stratford Paving 5.76m ²	
Approx. size: 2400 x 2400mm	Pallet weight: 536 kg
Contents: 9 = 600 × 600 11 = 600	6 = 300 × 300

PATIO PACKS

Stratford Octagon 5.06m ²	
Approx. size: 2250 x 2250mm	Pallet weight: 438 kg
Contents: 33 specific shapes	

PAVING STONES Size	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
900 × 600 (A) *+	1.8	59	11.1	20	1180
600 x 600 (B)	2.8	34	7.2	20	680
600 × 300 (C)	5.5	16	7.3	40	640
450 x 450 (D)	5	19	8.0	40	760
300 × 300 (E)	11	8	3.6	40	320

Thickness: 45mm (*50mm)

⁺Not available in Parisian


See Aurora & Sum Circle On pages 36-37

Aurora & Sun Circle


Our Aurora and Sun Circles are both created in a mix of two striking colours; Antique Grey and Barley which creates a dazzling effect in the sunlight that come rain or shine will brighten up any garden!

For additional sunshine in your garden, head over to page 63 to find out about our Celestial Sun stepping stones.

PLANS



Aurora Circle 1.8m



Corner infill sets sold separately

Sun Circle 2.56m





Sum Circle

Dazzles as a stand-alone feature or can easily be integrated into Stratford Paving using the corner infill set.

www.bowlandstone.com

36

PATIO & PAVING

Specifications

PATIO PACKS

1800mm (dia) 210 Pallet weight: 239 kg Inf	prox. size with infills: 0mm x 2100mm
Contents: 31 specific shapes Con	
	ill pallet weight: 199 kg
Sun Circle 2.56m	ntents: 16 specific shapes
	prox. size with infills: 00mm x 3000mm
Pallet weight: 435 kg Inf	ill pallet weight: 361 kg
Contents: 46 specific shapes Co	

PATIO & PAVING

Victorian Setts

Victorian Setts are a simple solution to bringing that period look to your garden with an elegant style.

Re-created from original traditional setts, our Diamond and Chevron Setts recapture the feel of a bygone era. Ideal for pathways, Victorian Setts are a timeless classic.





Diamond Sett


Chevron Sett

Specifications

PAVING STONES	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight	
224 x 112	40	2	1.9	75	150	

Thickness: 40mm



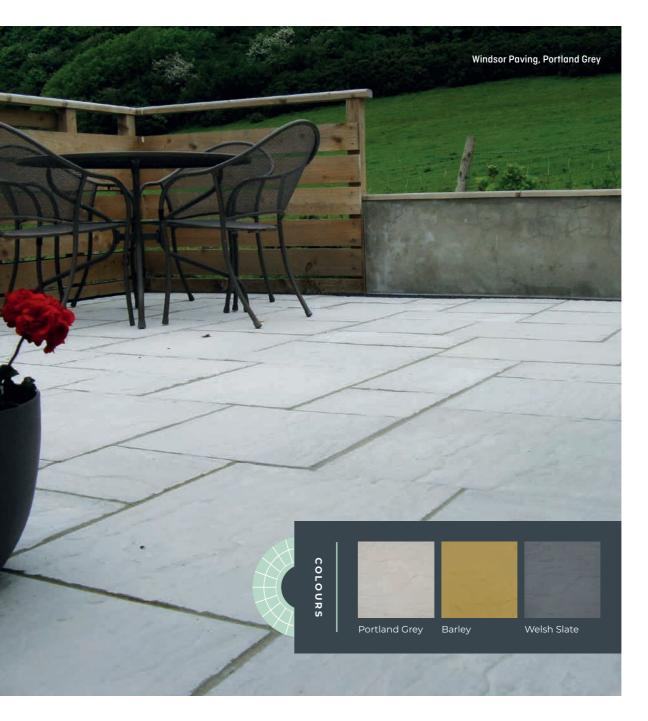

Windsor


Windsor paving is straight-edged with a lightly textured surface, true to the distinctive nature of classic Yorkshire stone.

Windsor has been a popular choice for creating delightful garden features for many years. Available in a variety of sizes, a truly random design can be achieved.

Specifications

PAVING STONES	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
600 x 600	2.8	30	8.9	25	750
600 x 300	5.5	14.5	9.1	50	725
450 x 450	5	17	10	50	850
300 x 300	11	7	4.5	50	350

Thickness: 38mm

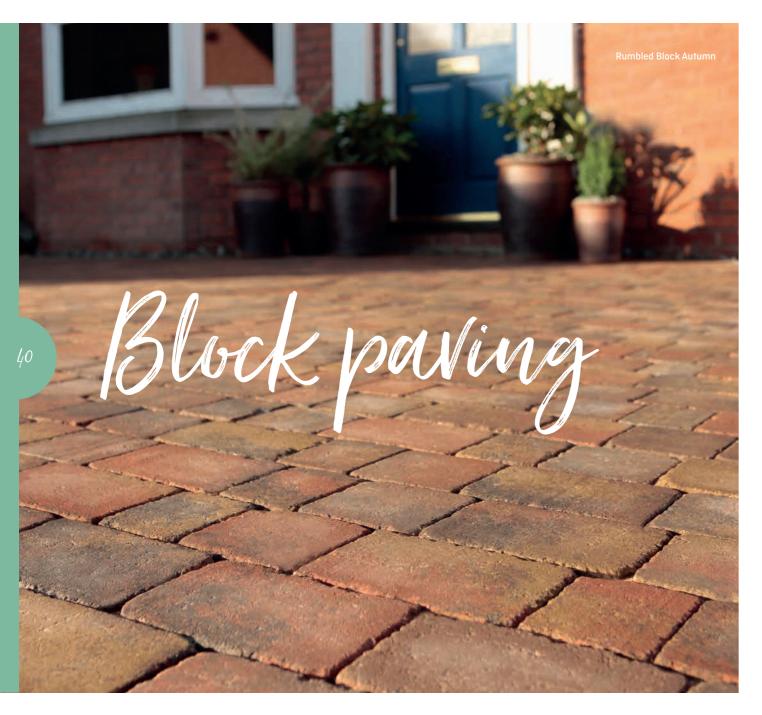


First Impressions

Create a wonderful first impression for your property with our desirable and durable collection of block paving.

41	Driveway
42	Rumbled
43	Stonemaster

IMPORTANT INFORMATION

All images shown in this brochure are for illustrative purposes only. Every effort is made to ensure accurate colour representation, however due to photographic and printing processes and varying light conditions, colours may not exactly match current production. We strongly recommend that colours are judged and chosen from actual materials and samples are sought from your local retailer.

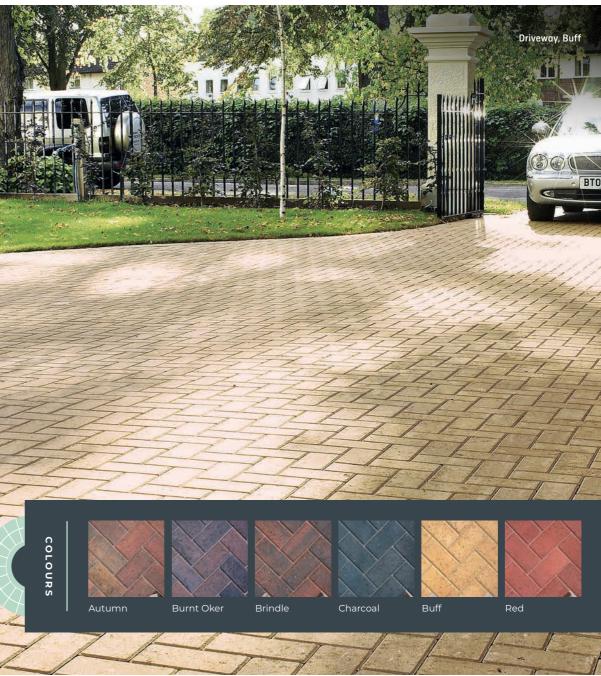

Privenay

A highly durable block paving not only suitable for driveways but a versatile solution for patios.

With 6 colour options, Driveway offers a wealth of mix and match possibilities.

Specifications


PAVING STONES	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
200 x 100	50	2.27	9.76	488	1110

Thickness: 50mm

Rumpled

Thanks to the rumbled finish, this charming cobble type paving has a softer surface with smooth rounded edges, enhancing its weathered appearance.


3 sizes in the range allows for numerous laying options.

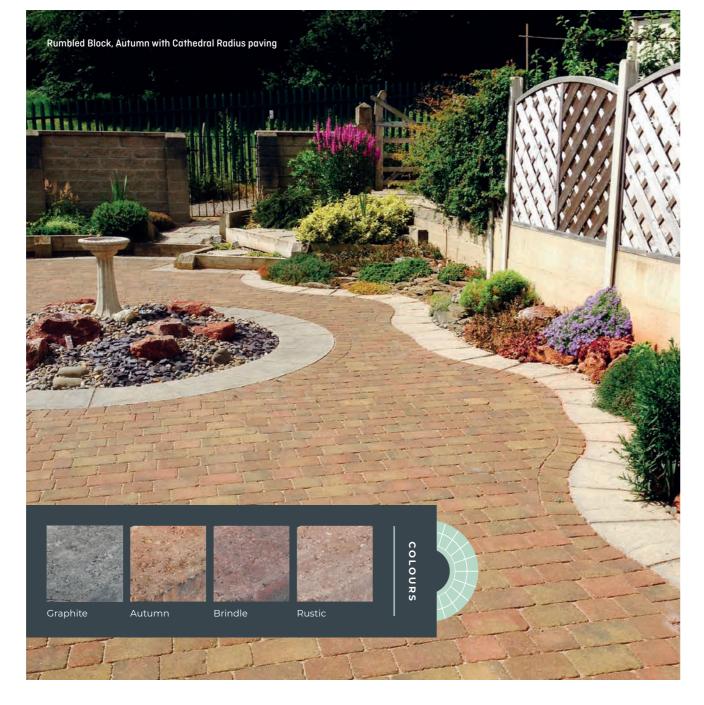

Specifications

PAVING STONES Size	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
200 x 134	37	2.98	9.08	336	1002
134 x 134	56	1.99	9.0	504	1002
100 x 134	75	1.49	8.96	672	1002

Thickness: 50mm

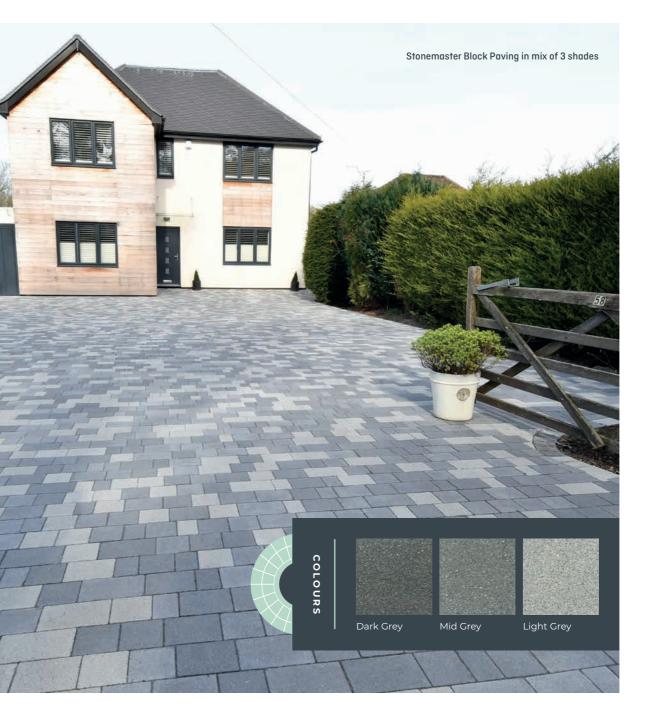

Stonemaster

Pre-treated with a Surface Protection this block paving guards against everyday contaminants such as oil, grease, moss & drinks and eases cleaning when used on drives and patios.

It can be laid in a single shade or mixed to fully replicate natural stone.

Specifications

PAVING STONES	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
300 x 100	33.3	4	7.20	240	960
Mixed size packs also		Thicknes	ss: 60mm		



Rich and harmonious tones

Whether you're planning a contemporary look or a classic English style, our exquisite natural stone will bring rich tones and provide depth to your garden.

45	Limestone
46	Sandstone
47	Smooth Natural Sandstone

IMPORTANT INFORMATION

All images shown in this brochure are for illustrative purposes only. Every effort is made to ensure accurate colour representation, however due to photographic and printing processes and varying light conditions, colours may not exactly match current production. We strongly recommend that colours are judged and chosen from actual materials and samples are sought from your local retailer.



limestone

With its consistent colour palette, gentle riven surface and hand cut edges, limestone is the perfect choice to give your outdoor area a durable yet sophisticated finish.

Suitable for both contemporary and traditional garden designs.

Specifications

PAVING PACK


Limestone 15.3m ²	Thickness: 22mm
Approx. size: 3400 x 4500mm	Pallet weight: 800 kg
Contents: 13 = 900 x 600 13 = 600 x 6	500 13 = 600 × 300 9 = 300 × 300

*Some sizes of Blue Black available in single sizes

NATURAL STONE PAVING

Sandstone

With an attractive finish and subtle tonal variations, making each piece unique, Sandstone is a popular choice for a wide variety of gardens.



Specifications

PAVING PACK

Sandstone Natural Stone 15.3m ²				
Approx. size: 3400 x 4500mm	Pall 825	et weigh kg	ıt:	
Contents: 13 = 900 × 600 13 = 600 × 6	500 13	= 600 x 30	00 9 = 30	00 x 300
	Jt		et	ght

PAVING STONES Size	Unit / m²	Unit weigh	m² / pallet	Unit / palle	Pallet weig
900 x 600 (A)	1.8	30	15.6	28	840
600 × 600 (B)	2.8	20	14.3	40	800
600 × 300 (C)	5.5	10	15.5	85	850
300 x 300 (D)	11	5	7.7	85	425

Thickness: 22mm - Approximately calibrated to 22mm



NATURAL STONE PAVING

www.bowlandstone.com



Smooth NATURAL SANDSTONE

A smooth diamond sawn sandstone that provides a tasteful, refined and elegant back drop for any garden.

Still encompassing all the colour & veining variations of natural sandstone, making each patio truly unique.

Specifications

PAVING PACK

Smooth Natural Sandstone 15.3m²

Approx. size: 3400 x 4500mm	Pallet weight: 825 kg
Contents: 13 = 900 × 600 13 = 600 ×	600 13 = 600 x 300 9 = 300 x 300
	71.1

Note: Smooth Natural Sandstone should be sealed prior to laying

NATURAL STONE PAVING

'Only available in paving packs not individuals sizes.



The best of both worlds

If you think porcelain is a little too delicate for paving, you're in for a very pleasant surprise. As well as providing a smooth, elegant finish, it also offers an amazingly hard wearing, scratch resistant and low maintenance surface.

49	Rock
50	Caprice
52	Mode Profiled
53	Tatra

IMPORTANT INFORMATION

A slurry primer needs to be applied to the reverse of each paver prior to laying, to aid adhesion.

All images shown in this brochure are for illustrative purposes only. Every effort is made to ensure accurate colour representation, however due to photographic and printing processes and varying light conditions, colours may not exactly match current production. We strongly recommend that colours are judged and chosen from actual materials and samples are sought from your local retailer.



Rock

Rock is recognised for its natural stonelike quality and offers clean lines, flexibility, and a contemporary look with a low-profile riven surface.

This range is available in 5 colours, in a single size or a four size patio pack, making it a natural-looking product that's simply unmatched.

Specifications

Rock Porcelain 19.89m²					
ROCK POICEIGIN 19.89M ²					
Approx. size: 5100 x 3900mm		Pallet 930 kg	weight:		
Contents: 18 = 895 x 595 16 = 595 x 595 18 = 595 x 295 13 = 295 x 295					
PAVING STONES Size	Unit / m²	Unit weight	$m^2/pallet$	Unit / pallet	Pallet weight
895 x 595	1.85	26.25	21.6	40	1050


41

An ultra modern design that

comes in two sizes.

Caprice creates a gorgeous urban look in any outdoor space.



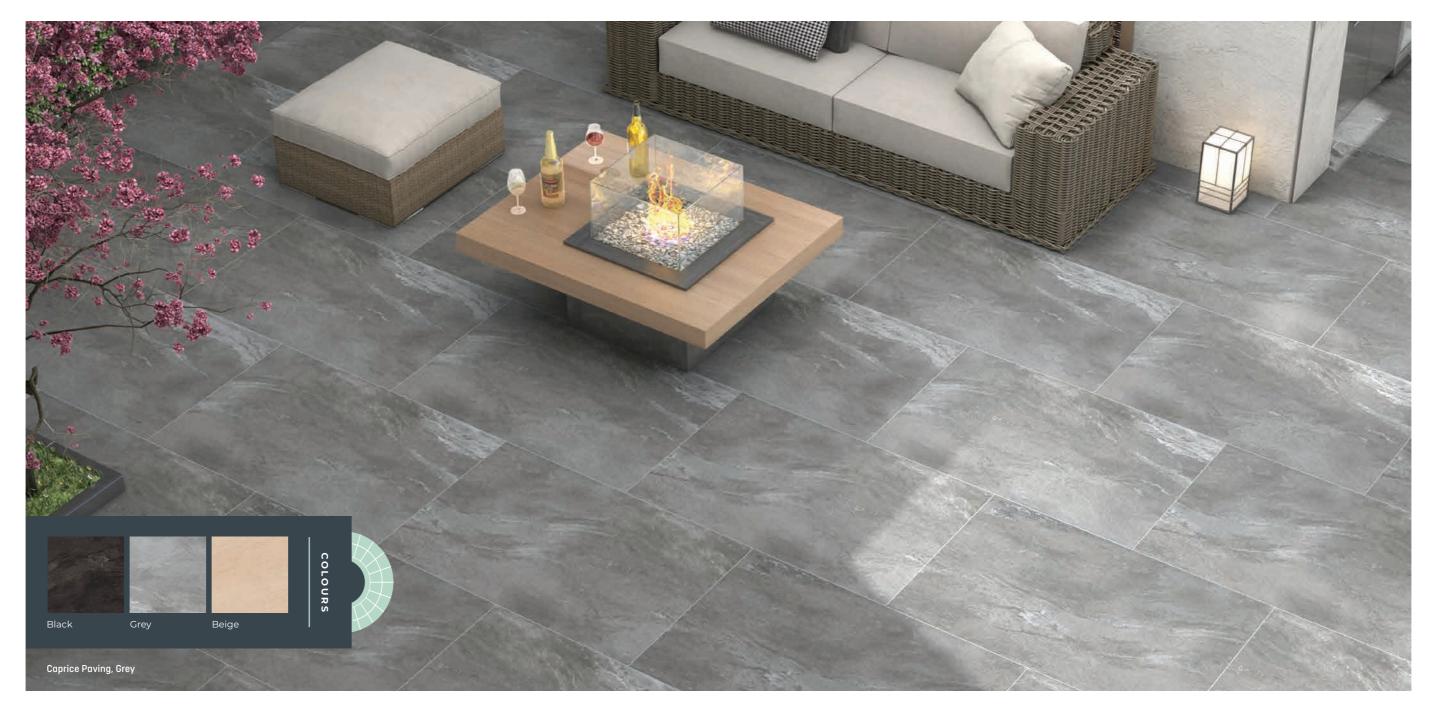

www.bowlandstone.com

Specifications

PAVING STONES Size	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
600 x 600	2.78	17.5	21.6	60	1050
900 x 600	1.8	26.25	21.6	40	1050

Thickness: 20mm


PORCELAIN PAVING

Mode Profiled

Looking to create the ultimate contemporary outdoor space?

Mode Profiled has a fine riven texture featuring mica crystals to add interest and sparkle to your patio.

Available in two sizes and four gorgeous shades, this range is designed to make a statement.

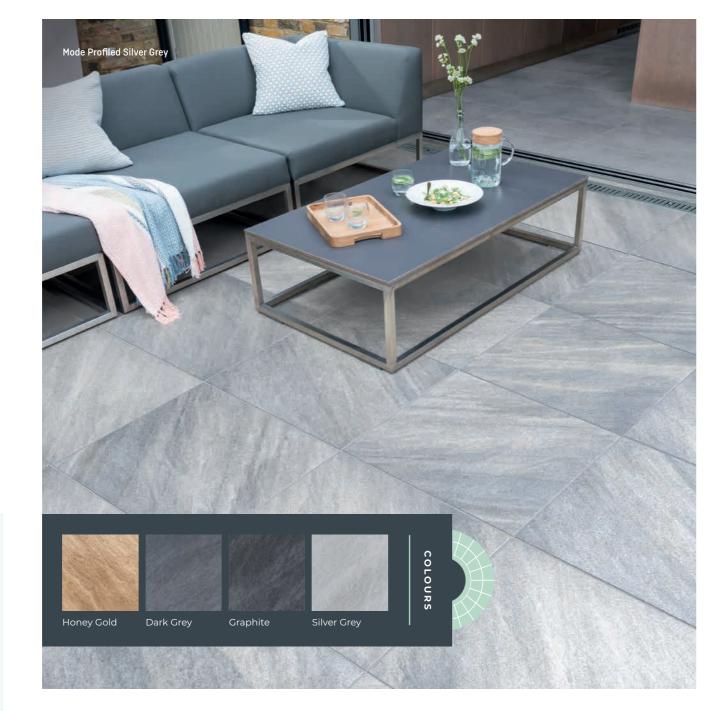


Specifications

PAVING STONES Size	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
595x595	2.8	17.5	21.6	60	1050
595x295	5.56	8.5	12.96	72	612

Additional sizes and 18.3m² paving pack available

Thickness: 20mm

www.bowlandstone.com

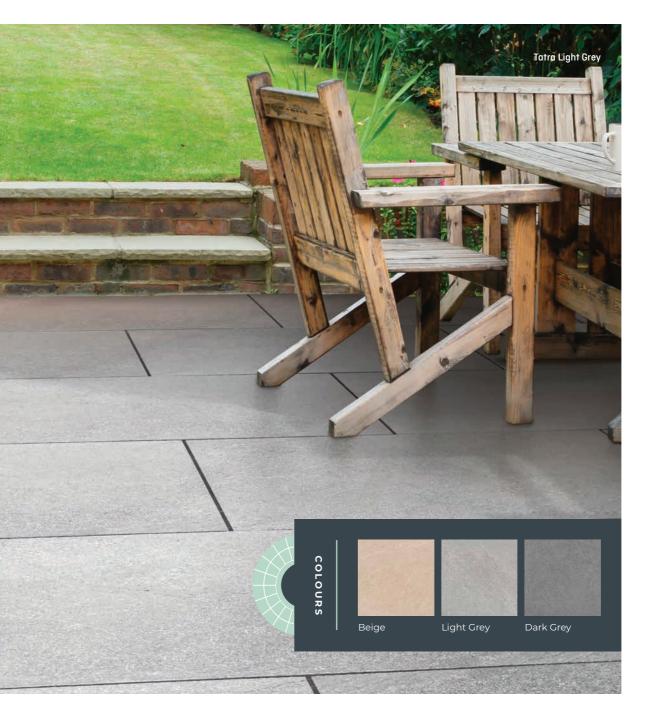

latra

This new range of Tatra Porcelain is now available in three colours and sizes. This range is designed to replicate Natural Stone and features many of its unique characters such as its distinct veining whilst having all the benefits of Porcelain. Each paver is fully rectified with precision edges for easy laying.

Please note these pavers will not be compatible with any previous range of the same name.

Specifications

PAVING STONES Size	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
1200 x 600	1.39	32.33	21.6	30	970
900 x 600	1.85	24.25	21.6	40	970
600 x 600	2.78	16.17	21.6	60	970

PORCELAIN PAVING



Closer to nature

From ponds and rockeries to driveways and paths, decorative stones are a versatile way to create interesting features and bring both colour and texture into your garden.

55	Decorative Aggregates
58	Rockery Range
59	Essentials Range
61	Horticultural Range

IMPORTANT INFORMATION

All images shown in this brochure are for illustrative purposes only. Every effort is made to ensure accurate colour representation, however due to photographic and printing processes and varying light conditions, colours may not exactly match current production. We strongly recommend that colours are judged and chosen from actual materials and samples are sought from your local retailer.



PEBBLES, CHIPPINGS & SLATES


Measure up

Use the table below to work out how many Large Packs you will need.

m ²	1	2	3	4	5
1	4	8	12	16	20
2	8	16	24	32	40
3	12	24	36	48	60
4	16	32	48	64	80
5	20	40	60	80	100

Based on a 50mm (2") average coverage. e.g. to cover an area of 3m x 2m at a depth of 50mm, you will require approx. 24 bags If you have a larger area to cover, our bulk bags cover between 9-10m². PEBBLES





Highland*



Ice White*



Ice White*

CHIPPINGS

AGGREGATES ARE A NATURALLY SOURCED PRODUCT AND DUE TO ITS NATURE THERE MAY BE SLIGHT VARIATIONS IN COLOUR AND SIZE WHICH ARE UNAVOIDABLE.













Brown Pea Gravel*

Chard Flint*

Cornish Granite*

Cotswold Cream

6-10mm

Easy Grid

Our durable plastic easy grid will help to keep your aggregates in place. Especially effective for driveways and well trodden gardens.



10-14mm

Emerald Green*




Huntleywood*

14-20mm

Moonstone



Pea Gravel*







Ground Cover

We would advise using our ground cover under your aggregate as an effective weed suppressant.





So

Somerset Grey

South Cerney

Thames Valley Flint*

56

SLATES





Blue Slate*

Blue Slate*





Green Slate*

Green Slate*



Plum Slate*



Plum Slate*



PREMIUM CHIPPINGS

Our Premium Chippings range are a versatile way to add texture and colour into your garden, while adding that touch of sophistication & flair.





Arctic Champagne

Graphite



White Marble



Lundy Lime



Alpine Blue*



Blossom*



Black Ice*



Smoky Black

Rockery

These stunning stones will spice up your garden allowing you to create striking garden features.

Rockeries can come in all shapes and sizes, from miniature rock gardens in containers to large slopes.



ROCKERY





Caledonian Cobbles (100-200mm)

Cotswold



Green Slate



Plum Slate

AGGREGATES



Green



Essentials

At Bowland Stone we have a large variety of extra items to help you to create your perfect garden. From essential sands and aggregates to bark and topsoil. If you cannot see what you are looking for on these next pages please visit our website or give one of our sales team a call, we are always happy to assist.

SANDS & BALLAST

Various types suitable for a variety of building uses including bedding paving stones and block paving, producing concrete mixes and filling joints.

SANDS & BALLAST



Yellow Ballast

Limestone Ballast

0-4mm Dust

PERMEABLE AGGREGATES

Various grades of 'clean' chippings to allow water drainage for use with block paving, to comply with driveway regulations.



Bedding

60

6mm 'clean' chipping used above the 14mm chipping, and below block paving. 6mm Clean Limestone.



Drainage

14mm 'clean' chipping used as a sub base. 14mm Clean Limestone.



Jointing

3mm 'clean' aggregate for filling the joints between block paving. Horticultural Grit.



Pea Gravel

A free-draining aggregate for use in drainage and pipe bedding.



Play Sand

Bring the fun of the beach to your garden.



Road Salt

Purpose produced to clear paths and driveways in icy conditions.

Also available







AND MORE

Horticultural



HORTICULTURAL

Get Planting - Give life to your soft landscaping projects using the perfect horticultural product. Perfect for Pot Topping, Soil Aeration, Planting & Blending, Moisture Retention.







Compost



Horticultural Grit*



Horticultural Potting Grit



Horticultural Sand

Topsoil



Everything you need in one place

All those little extras for your garden that just finish it off and complete your green escape. Complement your patios, walls & lawns with one of our finishing touches.

63	Stepping Stones
66	Lakeland Walling
67	Meadow Walling
68	Priory Cottage Walling
69	Priory Split Walling
70	Copings
72	Edging

IMPORTANT INFORMATION

All images shown in this brochure are for illustrative purposes only. Every effort is made to ensure accurate colour representation, however due to photographic and printing processes and varying light conditions, colours may not exactly match current production. We strongly recommend that colours are judged and chosen from actual materials and samples are sought from your local retailer.

Stepping Stones

Making use of Stepping Stones in your garden is a great way to complement patios or create a fun, winding pathway or walkway. Our ranges are diverse enough to match any scheme and connect all elements of your garden.



Cathedral RANGE



Cathedral

Colour: Weathered Moss

400mm (dia)



Cathedral Colour: Barley 400mm (dia)



Cathedral Colour: Weathered York 400mm (dia)

Catherine Wheel RANGE





Catherine Wheel Colour: Barley 450mm (dia) Catherine Wheel Colour: Weathered Slate 450mm (dia)

Celestial RANGE



Celestial Sun Colour: Antique Grey/Barley 450mm (dia)



Celestial Moon Colour: Welsh Slate 450mm (dia)



Celestial Star Colour: Mellow Gold 450mm (dia)


STEPPING STONES

Products	Size	Unit weight	Unit / pallet	Pallet weight
Chalice	300 (dia)	6.5	25	162.5
Cathedral	400 (dia)	9.8	25	245
Catherine Wheel	450 (dia)	9.8	25	245
Celestial Sun	450 (dia)	10.21	25	255.25
Celestial Moon	450 (dia)	10.21	25	255.25
Celestial Star	450 (dia)	10.21	25	255.25
Chapter Irregular	500 (dia)	11.2	25	280
Compass	440 (dia)	8.6	25	215
Deckstone	450 (dia)	10.75	25	268.75
Log	360 (dia)	8.7	20	174
Japanese	Various	17	25	425
Paw Print	400 (dia)	9.45	20	189
Rope	440 (dia)	11.06	25	276.50
Wild Bird Eagle	390 (dia)	10	25	250
Wild Bird Owl	390 (dia)	10	25	250
Wild Bird Woodpecker	390 (dia)	10	25	250
Garden Friends Hedgehog	300 (dia)	5.5	25	137.5
Garden Friends Squirrel	300 (dia)	5.5	25	137.5
Garden Friends Bee	300 (dia)	5.5	25	137.5
Garden Friends Butterfly	300 (dia)	5.5	25	137.5
Garden Friends Fox	300 (dia)	5.5	25	137.5











Japanese Colour: Antique Grey 475mm – 550mm (various sizes)



Japanese Colour: Barley 475mm – 550mm (various sizes)





Colour: Brown Oak 450mm (dia)







Compass Colour: Bath Buff 440mm (dia)





Log Colour: Driftwood 360mm (dia)

Chapter



Chapter Irregular Colour: Barley 500mm (dia)

64

STEPPING STONES



Wild Bird RANGE



Wild Bird Eagle Colour: Bath Buff 390mm (dia)



Wild Bird Owl Colour: Bath Buff 390mm (dia)



Wild Bird Woodpecker Colour: Bath Buff 390mm (dia)

Chalice RANGE



Chalice

Colour: Honey Brown

300mm (dia)



Chalice Colour: Mellow Gold 300mm (dia)



Chalice Colour: Welsh Slate 300mm (dia)





Garden Friends Hedgehog Colour: Bath Buff 300mm (dia)



Garden Friends Squirrel Colour: Bath Buff 300mm (dia)



Garden Friends Fox Colour: Bath Buff 300mm (dia)





Paw Print Colour: Barley 400mm (dia)



Garden Friends Butterfly Colour: Bath Buff 300mm (dia)

Garden Friends Bee Colour: Bath Buff

300mm (dia)

65

STEPPING STONES

lakeland

Lakeland faithfully captures the art of laying dry slate walling, providing a timeless structure for any garden.







Full Block[†]

66

Half Block[†]

Coping/Edging⁺


Flat Coping



Product	Size	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
Full Block*	440 x 120	17	12	3.8	60	720
Half Block*	220 x 120	33	6.5	1.8	60	390
Coping/Edging**	440 x 140	-	15	-	60	900
Flat Coping***	440 x 150	-	5	-	60	300

*Thickness: 115mm | **Thickness: 100mm | ***Thickness: 30mm



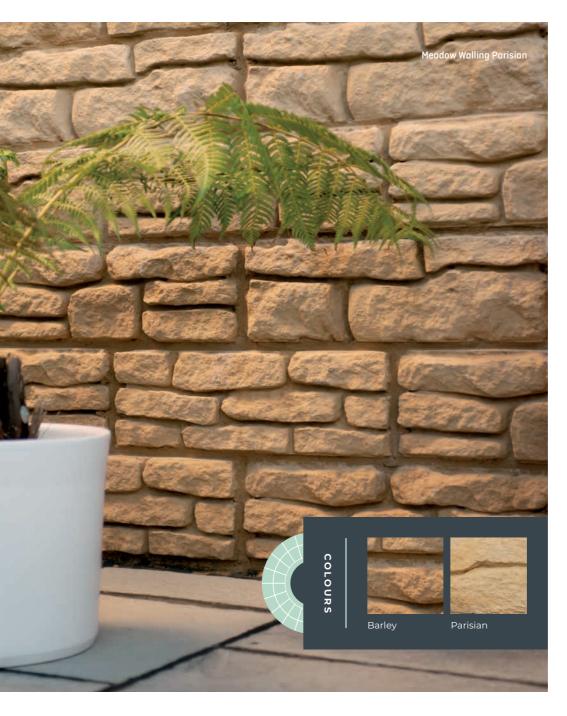

Meadow

Meadow Walling has been crafted using original natural dry stone walling masters, recreating a rustic look that is durable and versatile.







Full Block[†]

Double Coping**

Half Block[†] Coping/Edging

Single Coping

Doub	le Co	ping

Product	Size	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
Full Block*	440 x 150	14	12.5	4.3	60	750
Half Block*	215 x 150	28	12.5	2.15	60	360
Coping/Edging*	440 x 100	2.2	8	-	60	480
Single Coping**	600 x 160	1.66	9.5	-	50	475

*Thickness: 100mm | **Thickness: 40mm

600 x 280 1.66 16.5 - 50 825



Our Priory Cottage range reflects a more rugged and weather-worn style of walling.

Inspired by Cotswold Stone, this look is great for traditional gardens and adds a calming, rustic element to any patio area.




68

Priory Cottage Walling


Specifications

Size	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
220 x 65	58	2.67	6.6	374	1000
330 x 65	39	4.3	5.9	279	1200
220 x 140	29	6.47	6.1	170	1100
330 x 140	19	9.52	6.0	126	1200

Thickness: 100mm

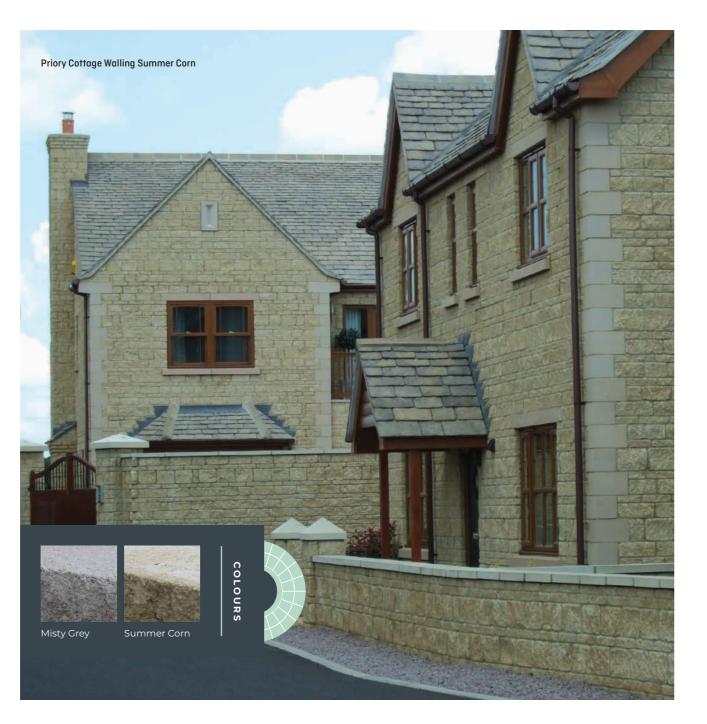

www.bowlandstone.com

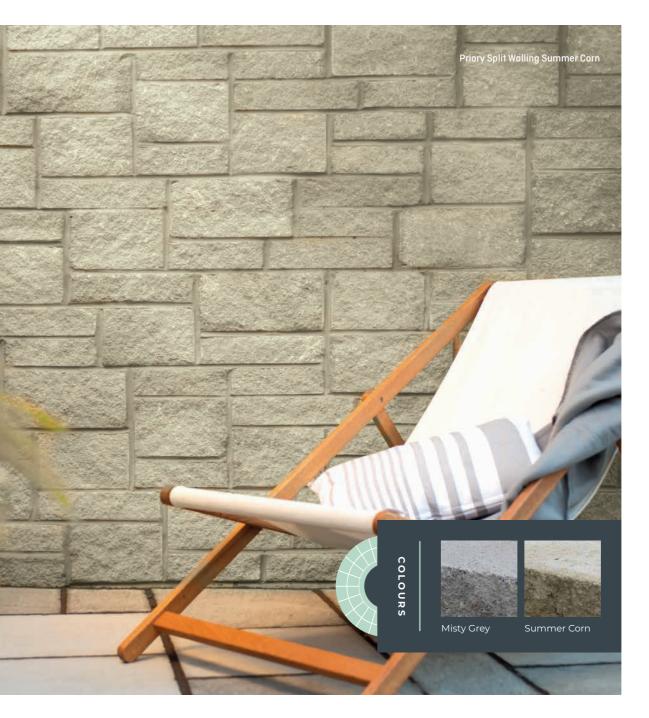

Pribry SPLIT WALLING

Similar to Priory Cottage, our Priory Split Walling range is inspired by the Cotswold Stone and is reminiscent of the countryside style.

With its traditional flat-split, rough-hewn face, this unique range will look the part in any garden.



Priory Split Walling

Specifications

Size	Unit / m²	Unit weight	m² / pallet	Unit / pallet	Pallet weight
220 x 65	58	2.67	6.6	374	1000
330 x 65	39	4.3	5.9	279	1200
220 x 140	29	6.47	6.1	170	1100
330 x 140	19	9.52	6.0	126	1200

Thickness: 100mm

Copings Flat Copings

Choose from either our Meadow or Lakeland range (see pages 66 and 67 for Lakeland and Meadow Walling).



Meadow Single Coping 600mm x 160mm x 40mm

Meadow Double Coping 600mm x 280mm x 40mm

Lakeland Flat Coping

440mm x 150mm x 30mm

Dale Coping

525mm x 160mm x 40mm


Available in: Welsh Slate

Once Weathered	Unit weight	No. Linear Mtr	Linear Mtr Pack	Unit / pallet	Pallet weight
Sizes	5	°Z	Lin	'n	Ра
600 x 180 x 65 (h)	14.5	1.66	24.1	40	580
600 x 225 x 70 (h)	24	1.66	24.1	40	960
600 x 300 x 70 (h)	24.5	1.66	12.0	20	490
600 x 355 x 70 (h)	29	1.66	9.6	16	464
600 x 400 x 80 (h)	36.5	1.66	9.6	16	584
600 x 450 x 75 (h)	38	1.66	9.0	15	570
Twice Weathered	Unit weight	No. Linear Mtr	Linear Mtr Pack	Unit / pallet	Pallet weight
600 x 140 x 50 (h)*	8	1.66	39.8	66	528
	Ŭ				020


*Without Drips


Sizes	Unit we	No. Line	Linear M	Unit / p	Pallet v
600 x 140 x 50 (h)*	8	1.66	39.8	66	528
600 x 180 x 50 (h)	12	1.66	32.5	54	648
600 x 225 x 50 (h)*	15	1.66	21.7	36	540
600 x 280 x 60 (h)	16	1.66	24.1	40	640
600 x 300 x 70 (h)	23.5	1.66	19.3	32	752
600 x 355 x 70 (h)	18	1.66	15.1	18	522

Available in: Portland Grey, Barley and Welsh Slate. Larger sizes of Barley and all Welsh Slate are made to order. Please ask in store.








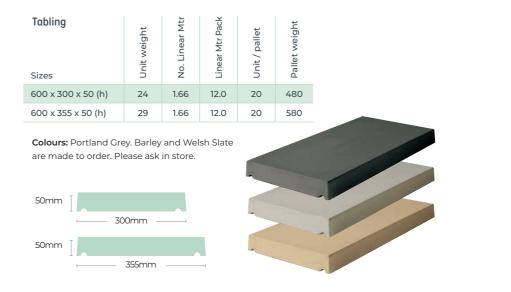

Pier Caps	Unit weight	Qty/m²	m² per Pack	Unit / pallet	Pallet weight
225 x 225 x 50 (h)	7	-	-	50	350
300 x 300 x 60 (h)	10	-	-	30	300
380 x 380 x 50 (h)	21	-	-	20	420
460 x 460 x 80 (h)*	23	-	-	8	184
520 x 300 x 90 (h)	19	-	-	16	304
520 x 520 x 100 (h)*	50	-	-	4	200
600 x 600 x 150 (h)*	67	-	-	4	268


Available in: Portland Grey, Barley and Welsh Slate. Larger sizes of Barley and all Welsh Slate are made to order. Please ask in store.





Coping Returns Sizes	Unit weight	Qty/m²	m² per Pack	Unit / pallet	Pallet weight
140 x 140 x 50 (h)	3	-	-	-	-
180 x 180 x 50 (h)	7	-	-	-	-
280 x 280 x 50 (h)	10	-	-	-	-

Colours: Portland Grey. Barley and Welsh Slate are made to order. Please ask in store.



COPINGS



Edgings not only keep walkways defined, but can also help keep your beds, gravel, soils and other aggregates in place. Edgings can also be used to define areas of your garden and to surround pathways for a clever, decorative way to separate patios or landscaped areas.

Product	Unit weight	No. Linear Mtr	Linear Mtr Pack	Unit / pallet	Pallet weight
Chesia	7	2.2	18.2	40	280
Half Rope Top	13	1.1	45.5	50	650
Rope corner	0.5	-	-	-	-
Full Scroll	11.5	1.7	23.5	40	460
Corner Dolly	1.5	-	-	-	-
Winchester	2	3.5	22.9	80	160
Victorian Scroll	3	4.3	11.6	50	150
Victorian	3	4.2	16.7	70	210
Rose Thistle	3	4.6	13	60	180
Half Round	15	1.1	54.5	60	900
Scalloped	7.7	1.7	29.4	50	385
Perimeter	7.94	2.2	20	44	350



Chesia Colours: Limestone, Antique Grey 435 x 250 x 30



Winchester Colour: Antique Grey 290 x 175 x 20



Rose Thistle Colour: Terracotta 215 x 190 x 25



Perimeter Colour: Welsh Slate 450 x 210 x 40




Half Rope Top Colours: Old Red, Welsh Slate, Barley 910 x150 x 50 Matching Corner Ends (Sold Separately)



Victorian Scroll Colours: Terracotta, Welsh Slate 230 x 175 x 40 Matching Corner Dolly (Sold Separately)



Half Round Colours: Grey, Welsh Slate, Bath Buff 910 x 150 x 50




Full Scroll Colours: Old Red, Welsh Slate, Barley 590 x 165 x 50



Victorian Colour: Welsh Slate 235 x 210 x 40



Scalloped Colour: Welsh Slate 590 x 160 x 40

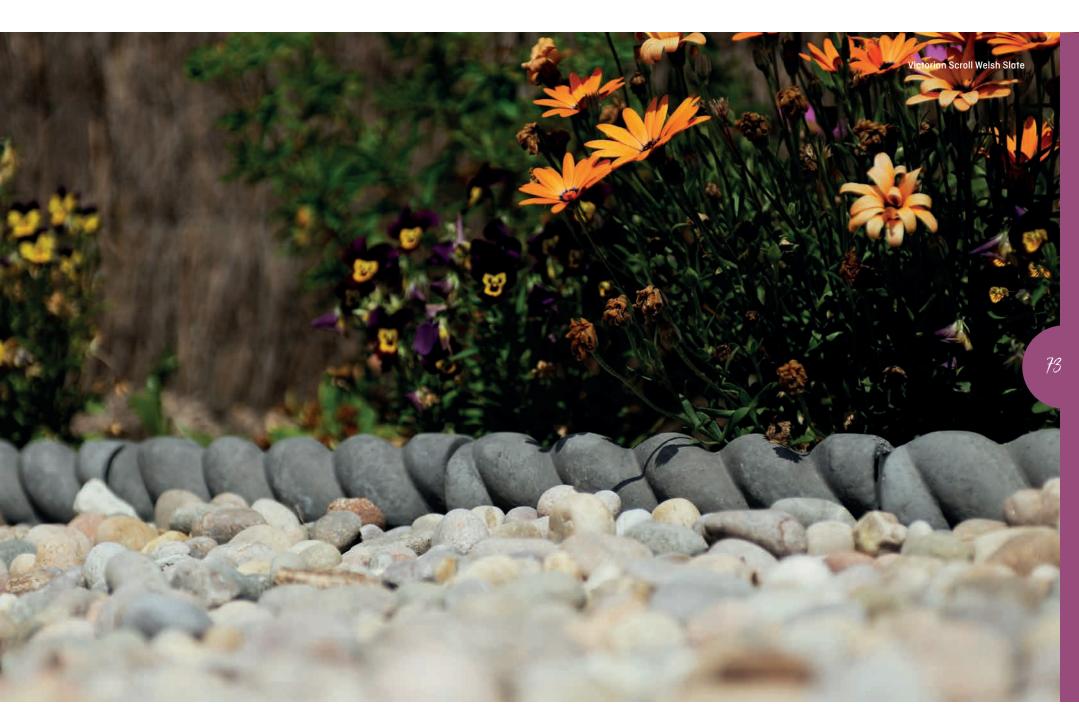



The finishing little touches

The Finishing Little Touches -From standard lap panels to the more ornate designs and all the extra bits and pieces that you need to enclose your green space and make it your own. Real turf, artificial grass or sleeper beds the choice is truly yours.

75	Fencing
76	Fencing Extras
77	Turf & Artificial Grass

IMPORTANT INFORMATION

All images shown in this brochure are for illustrative purposes only. Every effort is made to ensure accurate colour representation, however due to photographic and printing processes and varying light conditions, colours may not exactly match current production. We strongly recommend that colours are judged and chosen from actual materials and samples are sought from your local retailer.



Fencing Screen Panel Range

Choose from our range of decorative fence panels. Lisbon, Madrid and Florence to complete your garden.



Lisbon 1830 x 1830

Madrid 1830 x 1830



A sturdy garden wooden fence panel, 42mm thick.



75

Sizes available: 1830 × 1800 / 1830 × 1500 1830 × 1200 / 1830 × 900

1 2

Florence 1830 x 1830



Feather Edge Panel Board 1830 x 1800

Please enquire

Gazebos, arbours and other style panels available.

Fencing Extras



Trellis Thick timber panels ideal for climbing plants or creating a focal point.

Sizes available: 1830 × 1800 / 1830 × 1510 / 1830 × 1200 1830 × 900 / 1830 × 610 / 1830 × 320



Treated Timber Sleepers Our sleepers are perfect for a variety of uses including creating raised flower beds. Oak sleepers also available.



Wooden & Concrete Posts Choose from our pressure treated timber post or solid concrete posts.



Metposts We have a range of metposts for timber post support.



Recessed Gravel Boards

Concrete gravel boards act as a support for timber fencing and helps prevent premature damage as a result of moisture ingress.

Sizes available: 1800 × 300 / 1800 × 150




Plain Gravel Boards

Concrete gravel boards act as a support for timber fencing and helps prevent premature damage as a result of moisture ingress.

Sizes available: 1800 × 300 / 1800 × 150



Our artificial grass range will give any garden a natural, luxury look but with low maintenance.

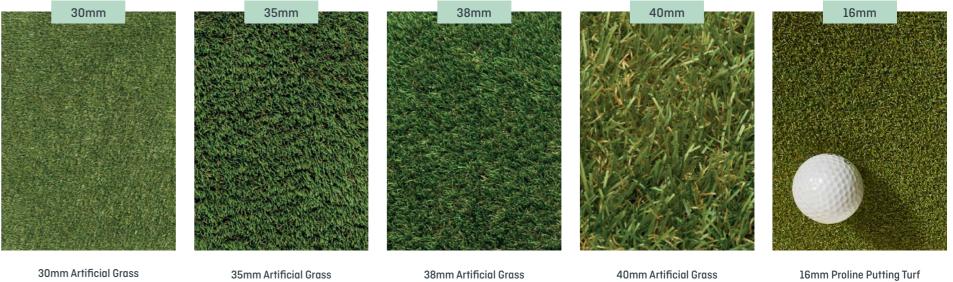

30mm tufted synthetic grass, soft to touch and durable making this a great all-rounder. Multiple blade shapes available. 35mm Artificial Grass 35mm tufted cut pile with a super soft feel, it's an ideal choice for children and pets. 38mm Artificial Grass 38mm tufted pile with a luxurious look and feel, it is an ideal choice for gardens that require a bit of 'luxury'. Multiple blade shapes available. 40mm Artificial Grass 40mm tufted synthetic carpet, the closest artificial grass to mimic real turf. 16mm Proline Putting Turf Provides a consistent surface that resembles a perfectly manicured putting green.


We also sell a high tolerance lawn turf which is ideal if you need a hard wearing lawn.



Start Creating

All the Do's and Don'ts to help you plan, prepare, lay and care for your patio.

80	Patio construction
82	Caring for your patio
84	Important information

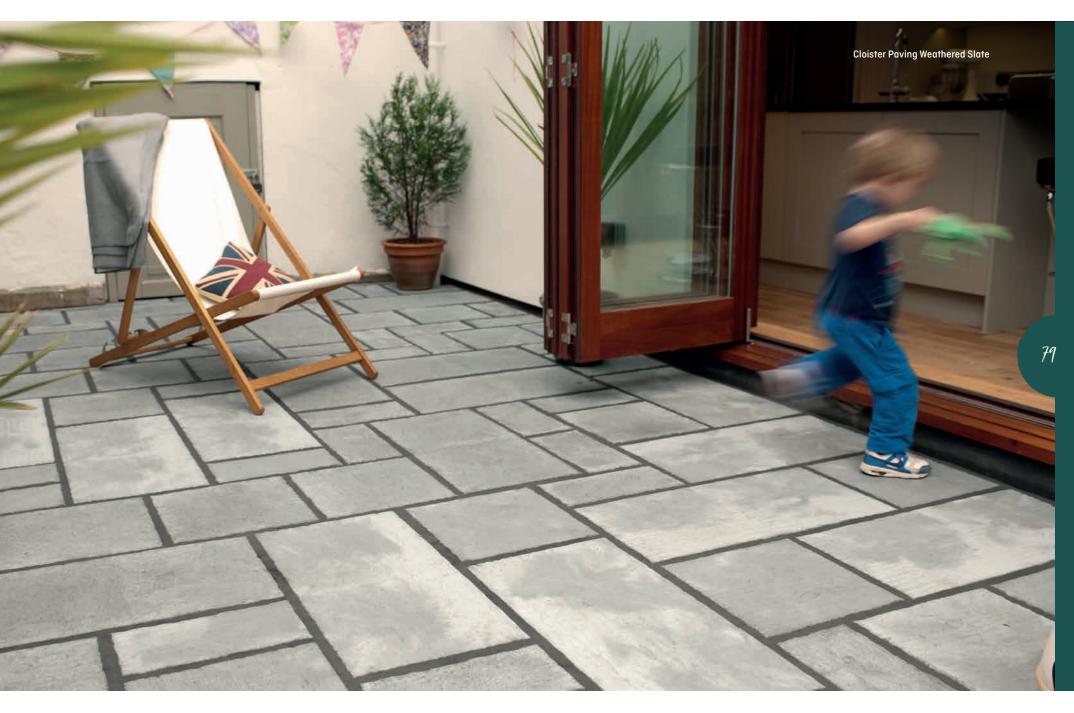



Step I (Planning)

Decide where you want to lay your new patio. First sketch out the area to be paved, showing all dimensions.

Include in the drawing items such as drains, height of damp proof course, the slope or fall of the area and any other constraints eg walls, lawns, steps etc.

Visit Bowland Stone or your nearest stockist to create your laying guide using the Bowland Stone Patio Generator.



Step 2 (Preparation)

The area to be paved must be firm and compact to avoid any subsidence. If necessary dig out any soft soil and replace with crushed stone preferably with a high dust content. The level of the ground at this stage should be approximately 55mm to 80mm below the final level of the paved area.

Poor drainage or installing paving onto an existing concrete/paved base can lead to high levels of moisture underneath the paving. This may result in discolouration/staining on the surface of the paving due to absorption of trapped water.



Step 3

At this stage as well as a trowel and shovel, a spirit level will be needed at least the length of the longest slab that is to be laid. Determine the quantities of sand and cement required for 'bedding' the slabs on. As a guide the bed should be between 15mm and 40mm thick and mixed in a ratio of 4 parts sand to 1 part cement, (mixed together in manageable quantities either by hand or a small mechanical mixer).

Decide where to lay the first slab, this is usually a corner slab and probably at the highest point. In most cases a slope of 1:100 is adequate to enable surface water to fall away from the house. It very often helps to use string and mark out the area, which helps to keep the joints at 90 degrees to each other. Continue laying your patio following your laying guide. We recommend that all paving is laid on a full mortar bed.



Step 4

The method of laying should be such that each slab must not bear any weight for at least one day. Care should also be taken to ensure that cement is kept off the surface of the paving as it can cause staining. The exact position of each slab should be achieved first time. To do this, do not apply excessive force on the slab but check with a spirit level and apply gentle pressure until the exact position is found. It is best to lay full slabs first and then cut any odd shapes and sizes that may be needed.

Step 5

Unlike all the previous stages, grouting can only be done on a dry day*. Building sand should be used, mixed at a ratio of 5 parts sand to one part cement. (*Alternatively use a jointing compound which requires water & can therefore be used during inclement weather). Bowland Stone colour additive can be used to complement or contrast the overall appearance. The total quantity should not exceed one bucket of grout at a time. With the use of either a bricklayers pointing trowel or pointing tool, push the mix into the gaps to form a uniform surface to the pointing ensuring that it is kept slightly below the surface of the paving. Excess mix should be swept aside and re~used but do not brush it over the slabs unti the mix has become dry. It is essential that the mix is moist but not wet to prevent the possibility of staining.



Caring for your patio

The following tips should help you keep your paving looking at its best for longer.

Regular washing and brushing should be adequate to maintain your patio.

Before using any cleaning materials consult your paving stockist to recommend an appropriate product.

> Test a small area before cleaning the patio.

4

If using patio cleaner, use sparingly (once or twice during the lifetime of the patio) as this may affect durability. 5



Do not use salt to de-ice your patio.

of the paving.

Sealants can be used but

they can affect the colour

Dark patches are due to differential weathering and exaggerated by efflorescence*. As with efflorescence the dark patches will generally disappear in time.

Fu ca wi

Fungal and algae growths can be cleared by spraying with fungicide.


Please note that although sometimes unsightly, blemishes or stains are unlikely to affect the performance of the paving. Always follow manufacturer's instructions when using cleaning equipment or materials. *Please refer to page 84 for further information.

8

U

We do not recommend the use of a pressure washer.



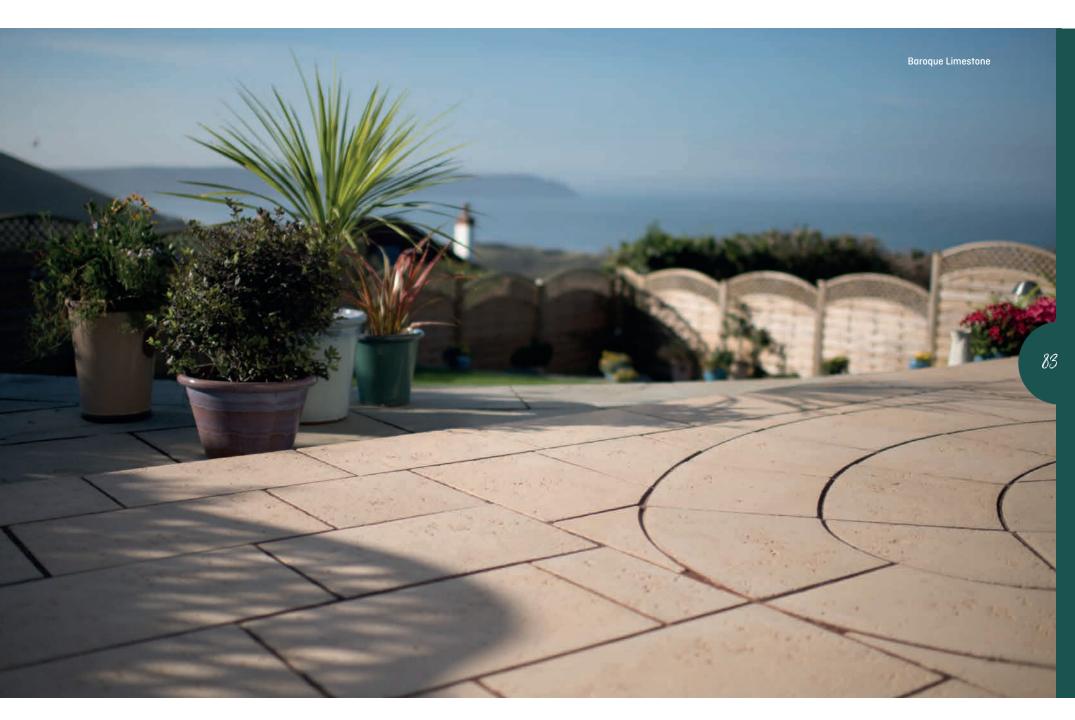

Important information

Product Colour

All images shown in this brochure are for illustrative purposes only. Every effort is made to ensure accurate colour representation, however due to photographic and printing processes and varying light conditions, colours may not exactly match current production. We strongly recommend that colours are judged and chosen from actual materials and samples are sought from your local retailer. It is also worth noting that the colour of new products will inevitably vary compared to those which have been installed for a period of time as weathering does take place.

Natural Stone products will naturally feature more colour variation than concrete products and several samples should be obtained. Bowland Stone does not take responsibility for any colour inaccuracies within this brochure compared to the products featured. Although every effort is made to ensure colour consistency, variations between production batches can occur, especially in blended shades. We recommend that where possible products are ordered from one batch and where multiple packs of product are ordered, thoroughly mix the products by drawing from different packs when laying.

Sizes

Bowland paving is manufactured to capture the authenticity of natural slabs and as such they may vary in thickness. All sizes & dimensions are nominal, subject to manufacturing tolerances and are for guidance only.

It is recommended to 'dry lay' your design first starting from the centre, (especially Bowland Stone feature kits including circles, stars, octagons, & ovals), which will allow you to establish the correct spacing between each slab to ensure your design fits perfectly in the area allocated.

Efflorescence

All quality products with a high cement content may suffer the temporary phenomenon of efflorescence. It can appear as a white powder or just an apparent lightening/fading of surface colour. It is caused by the migration of soluble salts (calcium hydroxide) through the damp paving surface which then reacts with atmospheric carbon dioxide to form calcium carbonate – a white deposit of low water solubility which is apparent as the surface dries.

Ideally it is better to let efflorescence disappear naturally, however it can be removed chemically by using propriety acid washing agents or brick/ patio cleaners in accordance with manufacturer's instructions. Trials should be carried out on samples or on a limited area, in order to assess the effect on the appearance. Please note that this can alter the appearance of the concrete by changing the surface texture and may also damage the concrete surface.

Weathering

Natural weathering and site conditions will also affect the appearance of paving along with seasonal manufacture or naturally occurring variations of the aggregates used in manufacturing.

Differential weathering can cause patchy, dark discolouration on the surface of individual paving slabs, due to the paving curing at different rates. This will generally diminish over time and will not affect the long term performance.

All products can develop algae and organic growths under certain environmental conditions and may require cleaning. Areas adjacent to borders, plant pots and trees may discolour from transfer of plant life. Specialist maintenance advice may need to be sought.

Bowland Stone do not recommend the use of road salt or the use of pressure washers, as both can damage the surface and appearance of the paving. Poor drainage or installing paving onto an existing concrete/paved base can lead to high levels of moisture underneath the paving. This may result in discolouration/staining on the surface of the paving due to absorption of trapped water.

Health and Safety / Product Handling

Care should be taken when handling / installing Bowland Stone products, we always recommend suitable lifting equipment or 2 person lifting on our larger size paving slabs.

- Always wear gloves and safety footwear when handling products
- Wear appropriate PPE if using cutting equipment
- Ensure products are on level ground before unwrapping and the product is supported before cutting bands to avoid breakages, chipping or damage to yourself

Delivered Goods

All products must be checked upon receipt. In the unlikely event of products reaching you in an unsatisfactory condition, please contact your retailer immediately, allowing time for the rejected product to be inspected and or replaced. Minor scuffs or bruises may occur during delivery, movement on-site and installation are generally unavoidable, in our experience these will weather in over time.

Bowland Stone cannot accept any responsibility for uplifting and relaying costs of defective products if upon inspection, it is deemed that the defect would have been apparent prior to laying.

Storage

Prior to laying, it is imperative that paving is stored in a vertical position, ideally with original spacers in between paving (not stored face to face touching) and it is adequately covered. Rain/ moisture can become trapped and settle between paving if left open to the elements, causing a drizzle like stain on the surface of the paving (particularly apparent in light coloured products). Bowland Stone will not take responsibility for any paving that has developed water marks/stains due to inadequate storage.

Application

Bowland Stone products, unless otherwise stated, are primarily intended for domestic/landscape use only. Decorative paving is not recommended for use on driveways. For areas subject to vehicular use, block paving products are recommended (see pages 40-43).

Liability

86

No charge is levied for this brochure and liability in respect of any statements, conditions, warranties and representations made on behalf of Bowland Stone is limited in accordance with the terms set out in Standard Conditions of Sale. While every effort is made to give sound advice, Bowland Stone cannot accept any responsibility for any loss, damage or injury as a result of following it. Bowland Stone will not take any responsibility or liability in respect of products being used for any purpose other than those for which they were intended. Due to our continuous evolution of product design and improvement, our range and specifications are subject to change without notice. Customers should check that all information is up to date.

Bowland Stone will not be liable for any fair wear and tear, wilful damage or negligence of the customer or abnormal conditions.

Costs

Please refer to your local retailer for all up to date pricing. Please be aware that paving is just one element of the total cost of laying a patio and is rarely the largest outlay.

Additional Product Information

Natural Stone

Unavoidable colour and thickness variations occur within the natural stone ranges. Our natural stone is sourced from suppliers who are registered with the 'ethical trading initiative'.

Natural Stone may develop added marking, deposits or patches as mineral content oxidises. Product should be mixed from a number of packs prior to installation and should always be laid on a full wet mortar bed. All Silver Grey Natural Sandstone products vary with differing geological conditions. Such variations can lead to small particles of ironstone within the product creating a darkening of the surface with natural weathering. This natural weathering is more obvious with Silver Grey Sandstone compared to other natural stone products due to its paler colour.

Sandstone needs to be handled very carefully when installing to minimise staining and we would advise that Smooth Natural Sandstone be sealed prior to laying using a breathable sealer. However, if this is not possible, it should be covered up as it is installed and sealed as soon as it is laid.

A slurry primer (such as Bradbond) should be applied to the underside of all Smooth Natural Sandstone, Natural Slate, Riverwashed Limestone and Granite paving prior to laying to improve adhesion. Blue Black Limestone is UV sensitive and over time will lighten in colour. It is recommended to seal limestone prior to laying or as soon after laying as practically possible. Never use acidic based products on limestone.

Porcelain paving

Manufactured from the finest raw materials, under strict controls allows for exceptional technical characteristics of full-body unglazed porcelain paving.

Anti-slip surface resistance

• Class 3 / R11 / Group C

The use of a slurry primer to the reverse of each paver is both essential and more importantly critical to the overall performance of porcelain paving. Applied to the underside using a stiff brush, it provides an exceptional bond between paver and the full wet bed underneath. Mixed to manufacturers instructions and applied with care it forms an immediate bond which prevents the pavers from lifting or potentially moving in the future when correctly laid.

We recommend a porcelain jointing compound for pointing. Do not use white cement nor materials containing black pigments. Finishes are intentionally manufactured with slightly uneven colour tones and surface decoration, these subtle variations set these products apart.

Porcelain paving can be cut on site and mostly to any size. We recommend the use of a portable saw (table saw, petrol driven disc cutter, rechargeable angle grinder) fitted with a good quality diamond porcelain blade. The blade should be water fed for dust suppression and to keep the blade cool. Scoring the product first and sawing from the face downwards will help to alleviate the potential risk of edge/surface chipping. Porcelain paving can be cleaned by applying a suitable cleaner. We strongly recommend the finished laid area be thoroughly cleaned/washed down which helps remove general building dirt, grout residue and any grease deposits that may be present. It is also recommended that periodic cleaning with porcelain cleaner will keep the paving looking its best.

Dependent on the type of stain / surface residue present (i.e. suction marks, grease, grout, general building site dirt) there is a wide range of off the shelf specialist cleaners available. Always check the manufacturers instructions first before applying to any test area.





Bowland Stone

1 Cole Road, St. Philips, Bristol BS2 OUG

t: 01179 557530 e: bristol@bowlandstone.com

Find even more inspiration at www.bowlandstone.com

